

Table of Contents

- 1. Safety information**
 - 1.1 Preparation
 - 1.2 Usage
 - 1.3 Marking
 - 1.4 Maintenance
- 2. Description**
 - 2.1 Part name
 - 2.2 Button description
 - 2.3 Sign definition
- 3. Specification**
 - 3.1 General
 - 3.2 Technical data
- 4. Operating guidance**
 - 4.1 Power On/Off
 - 4.2 Reading hold
 - 4.3 Backlight function
 - 4.4 Wind speed measurement
 - 4.5 Wind speed unit selection
 - 4.6 Area setting
 - 4.7 Air volume measurement
 - 4.8 Air volume unit selection
 - 4.9 Temperature unit selection
 - 4.10 Temperature mode selection
 - 4.11 USB real time data uploading
 - 4.12 Use tripod connection receptacle
 - 4.13 Replace battery
- 5. Attachments**

1. Safety Information

Please read carefully the following safety information before usage and maintain this anemometer while using it according to operating guidance, otherwise, the anemometer may be damaged. The anemometer will provide satisfactory services to you if you use and protect it appropriately.

1.1 Preparation

- 1.1.1 Please check for damage during transportation after receiving the anemometer.
- 1.1.2 If it should be stored and shipped under hard conditions, please confirm that whether the meter is damaged.

1.2 Usage

- 1.2.1 The meter should be used in the range of specified ambient temperature and humidity.
- 1.2.2 If you notice any abnormality or failure, it should stop using.
- 1.2.3 Don't store or use the meter under the conditions of direct sunlight, high temperature and high humidity.
- 1.2.4 Don't touch the fan blades with excessive force.
- 1.2.5 Don't directly expose the blades in the hard light to avoid reading error.

1.3 Marking

The **CE** mark indicates compliance with EMC requirements.

△ Important Safety Information

1.4 Maintenance

- 1.4.1 Repair or maintenance should be implemented by trained personnel.
- 1.4.2 If there is dust on the fan blade, please blow it with clean air or scrub gently with a damp cloth and mild detergent.
- 1.4.3 Clean the meter with a damp cloth and mild detergent. Don't use

abrasive material or solvent.

1.4.4 The meter should be powered off when it is not in use.

1.4.5 The meter will consume small current, about $\leq 5\mu\text{A}$, after shutdown. If the meter is not to be used for a long period, batteries should be



removed to prevent damaging the meter.

2. Description


- This meter is a digital anemometer for measuring the ambient temperature, humidity, dew point temperature, wet bulb temperature, wind speed, and air volume.
- This meter is a portable, professional measuring instrument with large-screen LCD and backlight, multi-unit switching functions.
- This meter can be used for hand-held or fixed measurement.
- This meter has the functions of reading hold, maximum, minimum, etc.
- It has a low battery indicator and USB real time data uploading functions.

Note : The Wet Bulb Temperature is the isobaric and adiabatic saturation temperature. The wet bulb temperature of the thermometer is measured with a thermometer on which water evaporates. The humid temperature is always lower than the dry temperature; they are all the more equal as the relative humidity is close to 100%. The dry temperature and the wet temperature are simultaneously measured by means of a psychrometer.


2.1 Part name

- (1) Fan
- (2) LCD
- (3) “” → Power switch
- (4) “**HOLD/MODE**” hold display, switch temperature mode
- (5) “/USB” → Backlight/USB real time data
- (6) “**FUNC**” → Function switching button
- (7) Maximum/Minimum button
- (8) “**UNIT**” → Unit switching button
- (9) Fan retaining bolt hole

- (10) USB cable socket
- (11) Battery housing cover retaining bolt hole
- (12) Battery cover
- (13) Connection hole for fixing measurement bracket

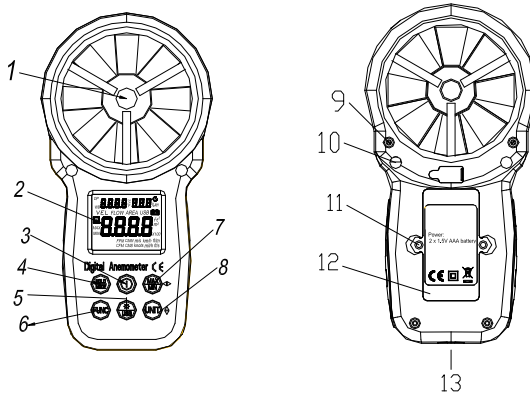

2.2 Button description

-  Button:

Switch for meter powering on/off.

-  /USB button

Switch for turning on/off the backlight and USB transmission.

- **HOLD/MODE** button

Switch for reading retention and temperature mode.

- **FUNC** button

It is used for switching among the functions of wind speed measurement, area setting and air volume measurement. Long press for three seconds to enable or disable "Auto Power-Off" function.

- **MAX/MIN** button

Switch maximum/minimum/normal mode.


- **UNIT** button


Switch unit, area (m², ft²), long press to switch (°C, °F)

Wind speed (m/s, km/h, mil/h, ft/m, ft/s, knots),

Air volume (CMS, CMM, CFM).

2.3 Sign definition

	Indicates Auto Power-Off status
H	Reading hold state
VEL	Wind speed measurement state
FLOW	Air volume measurement state
AREA	Area setting required by air volume
DP	Indicates that the current mode is dew point temperature mode
WB	Indicates that the current mode is wet bulb temperature mode
°C, °F	Temperature unit.
%RH	Relative humidity sign
USB	Indicates that USB real time data uploading is enabled
MAX	Displays maximum after entering maximum/minimum mode
MIN	Displays minimum after entering maximum/minimum mode

m²	Indicates that the current area setting unit is square meter
ft²	Indicates that the current area setting unit is square foot
CMM	Cubic meters per minute
CMS	Cubic meters per second
CFM	Cubic feet per minute
knots	Nautical miles per hour, 1850 meters per hour
ft/s	Feet per second
ft/m	Feet per minute
m/s	Meters per second
Km/h	Kilometers per hour
MPH	Nautical miles per hour
	Low battery indicator

3. Specification

The meter should be recalibrated under the condition of 18°C ~ 28°C, relative humidity < 75% every year.

3.1 General

3.1.1 Work height: Maximum 2000m


3.1.2 Work mode: Frequency of wind speed conversion

3.1.3 Display: LCD

3.1.4 Maximum show value: 9999

3.1.5 Sampling time: About 0.4s/time.

3.1.6 Auto power off: Turn off after 10 minutes

3.1.7 Low battery indicator:  sign displays on LCD.

3.1.7 Work power: 2×1.5V AAA batteries.

3.1.8 Operation environment:

Relative humidity→ 0~85%RH, no moisture condensation.

Temperature→ 0°C~40°C, no moisture condensation.

3.1.9 Detector (fan) operation environment:

Relative humidity→ 0~95%RH, no moisture condensation.

Temperature→ -20°C~70°C, no moisture condensation.

3.1.10 Storage environment:

Relative humidity→ 0~80%RH, no moisture condensation

Temperature→ -10°C~60°C, no moisture condensation

3.1.11 Dimension: Meter →165LX85 WX38Hmm.

3.1.12 Weight: About 200g

3.2 Technical data

Ambient temperature: 23±5°C, Relative humidity: <75%

3.2.1 m/s

Measuring range	Resolution	Accuracy
0.80 ~ 30.00 m/s	0.01 m/s	±(2.0% reading + 50 characters)
30.00 ~ 40.00 m/s		For reference only

3.2.2 km/h

1.40~108.00 km/h	0.01km /h	±(2.0% reading + 50 characters)
108.0 ~ 144.0 km/h		For reference only

3.2.3 ft/s

1.30 ~ 98.50 ft/s	0.01 ft/s	±(2.0% reading + 50 characters)
98.50 ~ 131.20 ft/s		For reference only

3.2.4 knots

Measuring range	Resolut ion	Accuracy
0.80 ~ 58.30 knots	0.01 knots	±(2.0% reading + 50 characters)
58.30~77.70 knots		For reference only

3.2.5 MPH

Measuring range	Resolut ion	Accuracy
0.90 ~ 67.20 MPH	0.01MP H	±(2.0% reading + 5 characters)
67.20~90.00 mil/h		For reference only

3.2.6 ft/m

Measuring range	Resolut ion	Accuracy
78 ~ 5900 ft/m	1ft/m	±(2.0% reading + 5 characters)
5900 ~ 7874 ft/m		For reference only

3.2.7 Air volume unit

CFM	0-99990	(Area) 0 - 9.999 ft ²
CMM	0-99990	(Area) 0 - 9.999 m ²
CMS	0 - 9999	(Area) 0 - 9.999 m ²

3.2.8 Ambient temperature, dew point temperature, wet bulb temperature

Measuring range	Resolution	Accuracy
-10°C ~ 60°C	0.1°C	±1.5°C
14°F ~ +140°F	0.1°F	±2.7°F

3.2.9 Relative humidity

Measuring range	Resolution	Accuracy
(20 ~ 80)%RH	0.1%RH	±3%RH@25°C
(<20 or >80)%RH	0.1%RH	±5%RH@25°C

4. Operating guidance

4.1 Power On/Off

Press the "Ⓞ" key more than 2 seconds to turn on, push it again to turn off the anemometer power.

4.2 Reading hold

In the measurement process, if the reading should be kept, press "HOLD/MODE" key to lock the reading, and display the **HOLD** symbol "H"; press it again to unlock.

4.3 Backlight

In the measurement process, if the ambient light is too dark to read, you can press "☀" key to open the backlight. Backlight timer is set to 15 seconds. During this period, you can press "☀" key again to turn off backlight at any time.

Note:

- The luminous body of backlight is LED with large operating current. Frequently using backlight will shorten battery life. Do not use backlight when unnecessary.
- When the battery voltage $\leq 7V$, the "🔋" (low battery) symbol will show on the display. However, in the case of using the backlight, if the battery voltage $\geq 7V$, the battery voltage drops because of its larger operating current, "🔋" symbol may show (when "🔋" symbol is showing, the accuracy of the measurement can't be guaranteed). At this moment, you needn't replace battery until the "🔋" symbol display again under normal use condition without using backlight.

4.4 Wind speed measurement

Place the detector (fan) into the test environment, "VEL" symbol will display on the screen, measurement is done with the fan surface perpendicularly to the wind direction.

Note:

1. If the detector (fan) is not aiming at the wind direction, which will bring the measurement error.
2. For steady wind, the detector (fan) will get maximum reading when it is aiming at the wind direction.

4.5 Wind speed measurement

When using the meter to measure air volume, you can press "UNIT" key to select the measurement unit you required (m/s, km/h, MPH, ft/m, ft/s, knots).

4.6 Area setting

To measure air volume, you should first determine the area of air flue to be, area input steps are shown as following:

- ① . Press **"FUNC"** key to make **"AREA"** display on the screen.
- ② . Use the **"MAX/MIN"** and **"UNIT"** keys to adjust value and unit, after adjusting area unit (m², ft²), then press **"MAX/MIN"** key. There should be an audible buzz, indicating that area input is completed and settings are saved.
- ③ . To change the area setting, please repeat the step ②.

4.7 Air volume measurement

Place the detector (fan) into the test environment. Use the **"FUNC"** key to set the meter to the Air volume measurement mode; the **"FLOW"** symbol should display on the screen.

Measurement is done with the fan surface perpendicular to the wind direction.

Note:

1. If the detector (fan) is not aligned in the wind direction, the measurement can be skewed.
2. For steady wind, the detector (fan) will get maximum reading when it is aiming at the wind direction.

4.8 Air volume unit selection

When using the meter to measure air volume, you can press the **"UNIT"** key to select the measurement unit your required (CMS, CMM, CFM).

4.9 Temperature unit selection

Long press the **"UNIT"** key for 3 seconds to switch temperature unit (°C, °F).

4.10 Temperature mode selection

Long press the **"HOLD/MODE"** key for 3 seconds to switch temperature mode (ambient temperature, dew point temperature and wet bulb


temperature).

4.11 USB real time data uploading

Long press the “☀/USB” key for 3 seconds to enable or disable USB real time data uploading function.

Detailed steps are shown as follows:


- 1 . Use CD to install the PC software and the USB drivers.
- 2 . Power on the meter and connect it to a computer with USB cable.
- 3 . Launch the PC software.
- 4 . Long press the “☀/USB” key for 3 seconds to enable the USB function of the meter.
- 5 . The PC software displays data and diagrams.
- 6 . Save or print data.

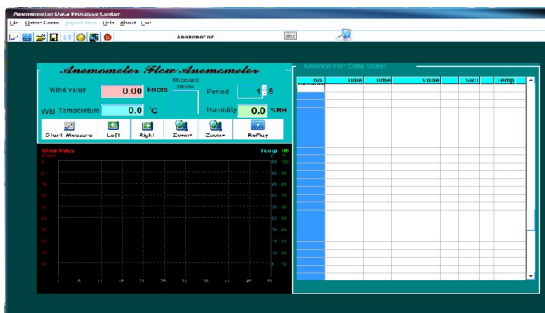

4.12 Using tripod connection receptacle

4.12.1 When necessary, the meter can be fixed on a tripod.

4.13 Replacing battery

4.13.1 If the “” sign appears, this indicates that the battery should be replaced.

4.13.2 Power off the meter and remove the battery cover.

4.13.3 Replace the old battery.

4.13.4 Install the battery cover properly.

5. Attachments

(1)	Battery	1.5V, AAA	2pcs
(2)	Detector Bracket		1pc
(3)	Packaging Bag		1pc
(4)	Operation Manual		1pc
(5)	CD		1pc

Liability Disclaimer

- The electrical and electronic wastes contain hazardous substances. Disposal of electronic waste in wild country and/or in unauthorized grounds strongly damages the environment.
- Please contact your local or/and regional authorities to retrieve the addresses of legal dumping grounds with selective collection.
- All electronic instruments must from now on be recycled. User shall take an active part in the reuse, recycling and recovery of the electrical and electronic waste.
- The unrestricted disposal of electronic waste may do harm on public health and the quality of environment.
- As stated on the gift box and labeled on the product, reading the “User manual” is highly recommended for the benefit of the user. This product must however not be thrown in general rubbish collection points.
- The manufacturer and supplier cannot accept any responsibility for any incorrect readings and any consequences that occur should an inaccurate reading take place.
- This product is designed for use in the home only as indication of the temperature.
- This product is not to be used for medical purposes or for public information.

- The specifications of this product may change without prior notice.
- This product is not a toy. Keep out of the reach of children.
- No part of this manual may be reproduced without written authorization of the manufacturer.



RED Directive 2014/53/EU

Summary of the Declaration of Conformity : We hereby declare that this wireless transmission device does comply with the essential requirements of RED Directive 2014/53/EU.

LA CROSSE TECHNOLOGY
6A Rue du commerce
67118 GEISPOLSHEIM
FRANCE

Digital Anemometer

WS9501

Operation Manual

